



FULL FLOW BALL VALVES: IDEAL

492BC Thermometer union complete with thermometer



MEASURE	PRESSURE	CODE	PACKING
1" (DN 25)	10bar/145psi	4920100BC	4/56
1"1/4 (DN 32)	10bar/145psi	4920114BC	4/48

CERTIFICATIONS



TECHNICAL SPECIFICATIONS

Suitable for ball valves art. 098SDC, 098SDCB, 298SDC and 298SDCB.

Body in nickel-plated brass.

O-ring in NBR.


Thermometer range: 0°C, 80°C.

Diameter: mm.40.

Maximum working temperature: 80°C.

Threads: ISO 228 (equivalent to DIN EN ISO 228 and BS EN ISO 228).

OVERALL DIMENSIONS

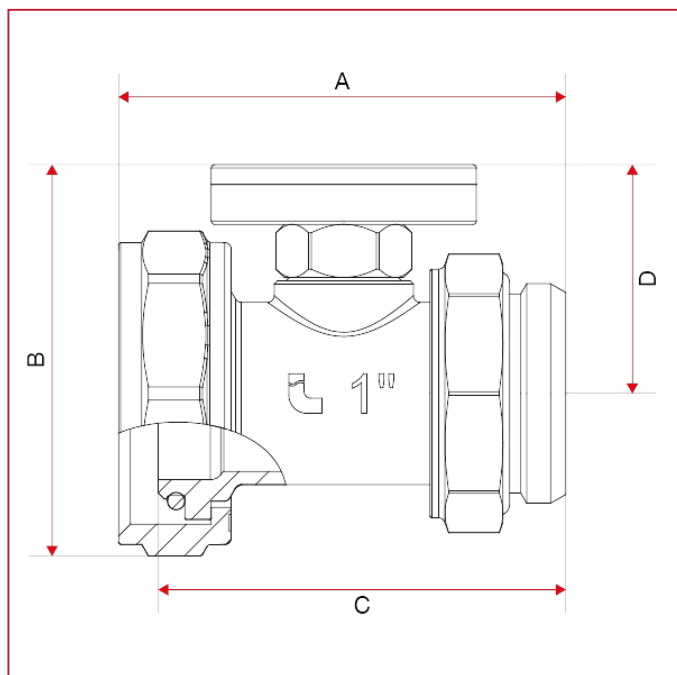




FULL FLOW BALL VALVES: IDEAL

	1"	1"1/4
A	67,5	79,5
B	49	55
C	61,5	73
D	34,5	39
Kg/cm2 bar	10	10
LBS - psi	145	145

MATERIALS size 1"

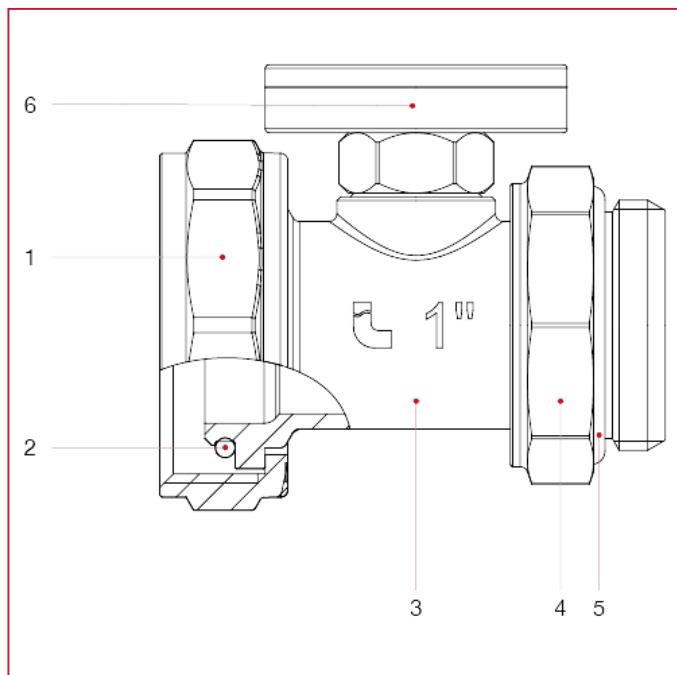


POS.	DESCRIPTION	N.	MATERIAL
1	Nut	1	Nickel-plated brass CW617N
2	O-ring	1	NBR
3	Thermometer fitting	1	Nickel-plated brass CW617N
4	Nut	1	Nickel-plated brass CW617N
5	O-ring	1	NBR
6	Thermometer	1	Brass CW614N



FULL FLOW BALL VALVES: IDEAL

MATERIALS size 1"1/4"

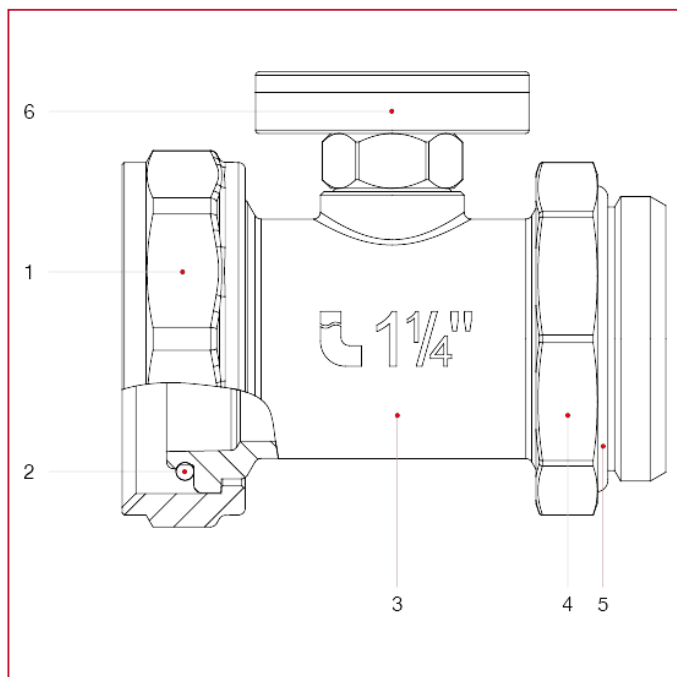

POS.	DESCRIPTION	N.	MATERIAL
1	Nut	1	Nickel-plated brass CW617N
2	O-ring	1	NBR
3	Thermometer fitting	1	Nickel-plated brass CW617N
4	Nut	1	Nickel-plated brass CW617N
5	O-ring	1	NBR
6	Thermometer	1	Brass CW614N



ITAP S.p.A.
Via Ruca 19
25065 Lumezzane
Brescia (ITALY)
Tel 030 8927011
Fax 030 8921990
www.itap.it - info@itap.it

We reserve the right to make improvements and changes to the products described herein and to the relative technical data, at any time and without forewarning.

rev. 20260505